

LAUNCH TECH USA



TLT211-AS

2-Post Lift • 11,000 lbs Capacity

The TLT211-AS is a heavy-duty lift that is perfect for lifting the smallest economy cars to the largest SUV's and front-end heavy diesel pickups. The increased productivity to lift both symmetrically or asymmetrically assures maximum service bay efficiency. This ALI/ETL Certified lift comes with a one (1) year limited warranty.


LIMITED STOCK - AVAILABLE FOR SOCIAL ORDER




TLT 211-AS

Features & Benefits

- 1 **Adjustable Column Height** - Provides an extra 6" of height adjustment for ease of installation with various ceiling heights.
- 2 **Rubber Door Guards** - Provides added security against door damage.
- 3 **Outer Hose Guards** - Protects hydraulic hoses from damage.
- 4 **Stackable Foot Pad Extensions** - Extra tall applications are no problem with the four 6" tall and four 3" short extensions.
- 5 **Single Point Lock Release** - Allows technicians to disengage both column locks simultaneously.
- 6 **Heavy-Duty Arm Restraint System** - Oversize rugged steel gears, pins, and springs for trouble free operation.
- 7 **Double Telescoping Screw Pads** - Used with or without rubber pads offering 6.5" adjustment for complete vehicle coverage.
- 8 **Standard Asymmetric** - Lift installed with columns facing each other.

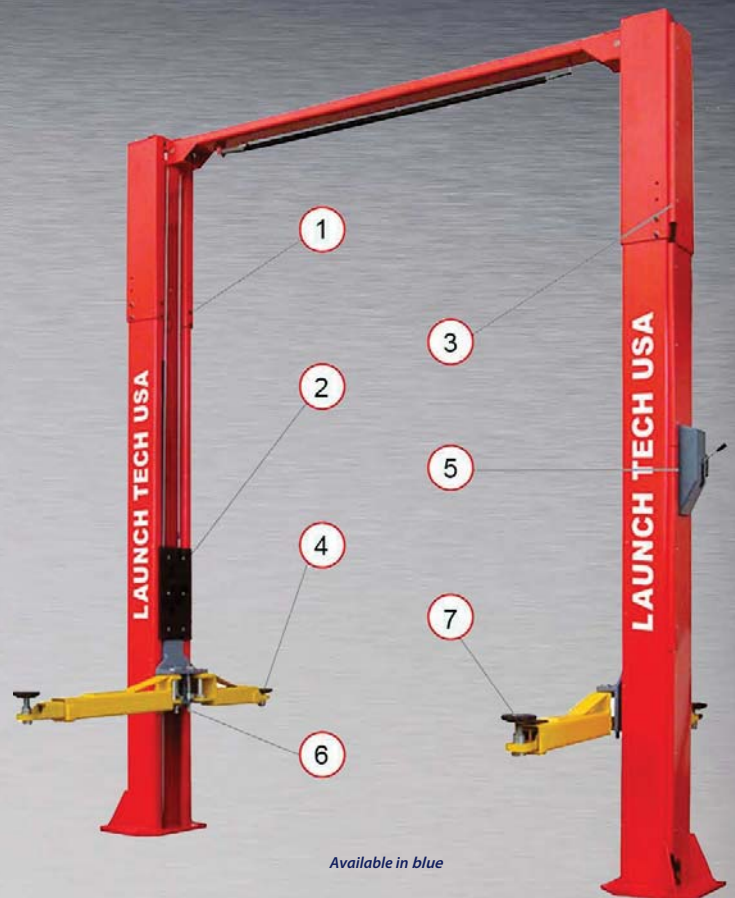

Available in blue



1



2




3



4




5



6



7



8

A Word About Lift Certification: When found on an Automotive Lift such as the product represented by Launch Tech USA, this mark indicates that The Automotive Lift Institute (ALI) certifies that the TLT211-AS described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and is Third Party Validated by the ETL Testing Laboratory.



Scott Terry LLC
www.utahlifts.com
 801-580-4744
scottterryllc@icloud.com

Specifications

TLT211-AS

A. Maximum Lifting Height	75.6" (1920mm)
B. Minimum Column Height	143" (3634mm)
C. Cylinder Full Height	145.4" (3541mm)
D. Total width	137.8" (3500mm)
E. Drive-Thru Clearance	96" (2438mm)
F. Floor to Overhead Switch	140" (3556mm)
G. Front Arm Reach (min / max)	23.6" (600mm) / 39.4" (1000mm)
H. Rear Arm Reach (min / max)	38.6" (980mm) / 61.8" (1570mm)
I. Screw Pad Height	4.3" (101mm) 7.8" (198mm)
J. Inside Column Width	108" (2742mm)
Motor	2HP
Voltage	208-230 Volt/60hz/Single Phase
Rise Speed	54 Seconds
Max. Load Per Arm	2750 lbs. (1247 Kilos)
Min. Ceiling Height Required	143.5" (3644mm)
Narrow Bay Setting	Non-Adjustable
Maximum Column Height	149" (3874mm)
Capacity	11,000 lbs
Ship Weight	1,940 lbs
Ship Dimensions	110"L x 24"W X 48"H